


Fabricated Elbow 'SL' Style Discharge Head

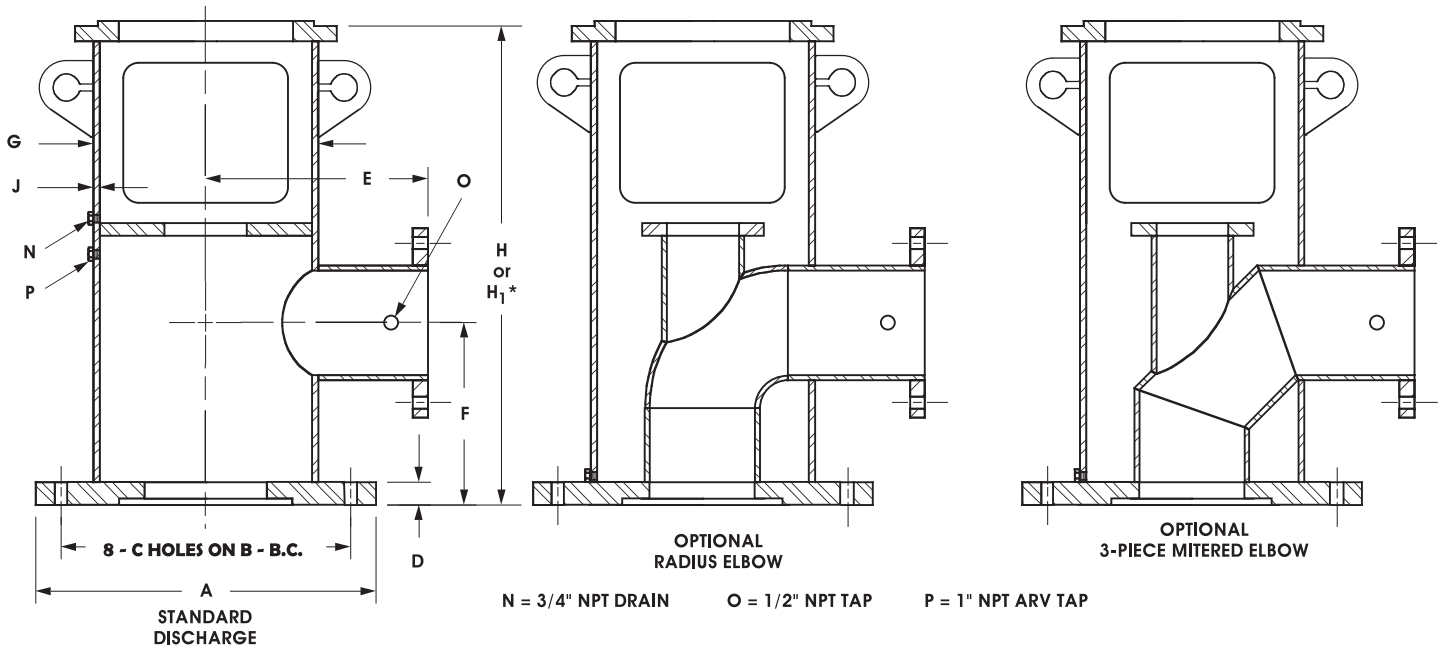

Model	Driver B.D.	Disch. & Col. Size	A	B	C	D	E	F	G	H	H ₁	J
SL-3	10 to 12	3	16.00	14.25	0.75	1.13	11.00	6.00	10.75	19.00	H ₁ dimension must be specified when using a spacer type flanged motor coupling and will vary according to coupling size and sealing arrangement. Consult factory.	0.37
SL-4	10 to 12	4	16.00	14.25	0.75	1.13	11.00	6.50	10.75	21.00		0.37
SL-5	10 to 12	5	19.00	17.00	0.88	1.38	12.00	7.00	12.75	24.00		0.38
SL-5	16	5	19.00	17.00	0.88	1.38	12.00	7.00	14.00	24.00		0.38
SL-6	10 to 12	6	21.00	18.75	0.88	1.38	12.00	8.00	12.75	25.00		0.38
SL-6	16	6	21.00	18.75	0.88	1.38	12.00	8.00	14.00	25.00		0.38
SL-8	10 to 12	8	27.50	25.00	0.88	1.38	16.00	9.00	14.00	28.00		0.38
SL-8	16 to 20	8	27.50	25.00	0.88	1.38	16.00	9.00	14.00	28.00		0.38
SL-8	24	8	27.50	25.00	0.88	1.38	16.00	9.00	14.00	28.00		0.38
SL-10	10 to 12	10	32.00	29.50	1.00	1.38	18.00	10.00	14.00	30.00		0.38
SL-10	16 to 20	10	32.00	29.50	1.00	1.38	18.00	10.00	16.00	30.00		0.38
SL-10	24	10	32.00	29.50	1.00	1.38	18.00	10.00	18.00	30.00		0.38
SL-10	30	10	32.00	29.50	1.00	1.38	18.00	10.00	24.00	30.00		0.50
SL-12	16 to 20	12	32.00	29.50	1.00	1.38	18.00	12.00	18.00	33.00		0.38
SL-12	24	12	32.00	29.50	1.00	1.38	18.00	12.00	18.00	33.00		0.38
SL-12	30	12	32.00	29.50	1.00	1.38	18.00	12.00	24.00	33.00		0.50
SL-14	16 to 20	14	34.25	31.75	1.13	1.88	21.00	13.00	18.00	35.00		0.38
SL-14	24	14	34.25	31.75	1.13	1.88	21.00	13.00	20.00	35.00		0.38
SL-14	30	14	34.25	31.75	1.13	1.88	21.00	13.00	24.00	35.00		0.50
SL-16	16 to 24	16	36.50	34.00	1.13	1.88	21.00	14.00	24.00	37.00		0.50
SL-16	30	16	36.50	34.00	1.13	1.88	21.00	14.00	24.00	37.00		0.50
SL-18	16 to 24	18	36.50	34.00	1.12	1.88	23.00	16.00	24.00	41.00		0.50
SL-18	30	18	36.50	34.00	1.12	1.88	23.00	16.00	24.00	41.00		0.50
SL-20	16 to 24	20	43.75	40.50	1.62	1.88	25.00	18.00	24.00	44.00		0.50
SL-20	30	20	43.75	40.50	1.62	1.88	25.00	18.00	24.00	44.00		0.50
SL-20	36	20	43.75	40.50	1.62	1.88	25.00	18.00	30.00	44.00		0.50
SL-24	16 to 24	24	43.75	40.50	1.62	2.38	25.00	20.00	30.00	48.00		0.50
SL-24	30	24	43.75	40.50	1.62	2.38	25.00	20.00	30.00	48.00		0.50
SL-24	36	24	43.75	40.50	1.62	2.38	25.00	20.00	30.00	48.00		0.50

v21.1