


Fabricated Elbow 'SL' Style Discharge Head For Booster Can

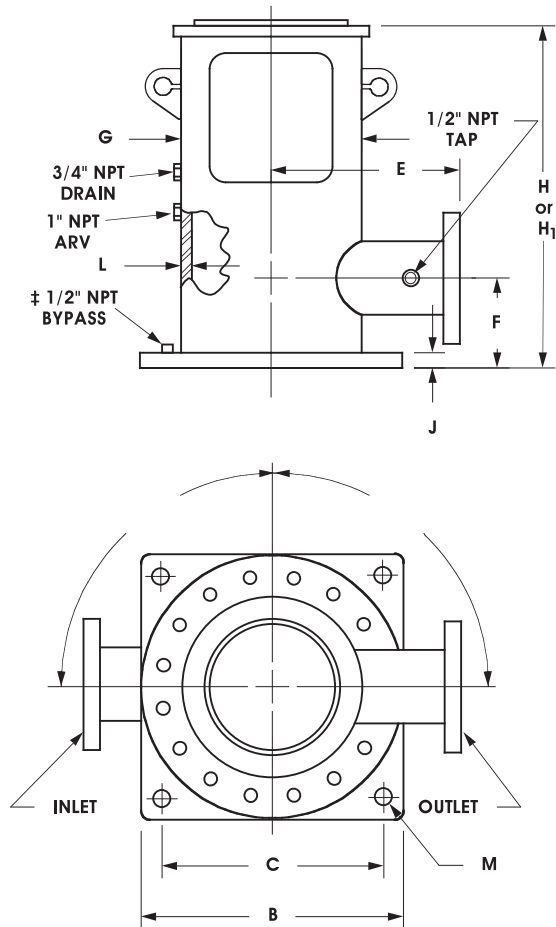

Model	Driver B.D.	Disch. & Col. Size	E	F	G*	H	H ₁	J	L
SL-3	10 to 12	3	Consult Factory	6.00	10.75	19.00	Consult Factory	1.13	0.37
SL-4	10 to 12	4		6.50	10.75	21.00		1.13	0.37
SL-5	10 to 12	5		7.00	12.75	24.00		1.38	0.38
SL-5	16	5		7.00	14.00	24.00		1.38	0.38
SL-6	10 to 12	6		8.00	12.75	25.00		1.38	0.38
SL-6	16	6		8.00	14.00	25.00		1.38	0.38
SL-8	10 to 12	8		9.00	14.00	28.00		1.38	0.38
SL-8	16 to 20	8		9.00	14.00	28.00		1.38	0.38
SL-8	24	8		9.00	14.00	28.00		1.38	0.38
SL-10	10 to 12	10		10.00	14.00	30.00		1.38	0.38
SL-10	16 to 20	10		10.00	16.00	30.00		1.38	0.38
SL-10	24	10		10.00	18.00	30.00		1.38	0.38
SL-10	30	10		10.00	24.00	30.00		1.38	0.50
SL-12	16 to 20	12		12.00	18.00	33.00		1.38	0.38
SL-12	24	12		12.00	18.00	33.00		1.38	0.38
SL-12	30	12		12.00	24.00	33.00		1.38	0.50
SL-14	16 to 20	14		13.00	18.00	35.00		1.88	0.38
SL-14	24	14		13.00	20.00	35.00		1.88	0.38
SL-14	30	14		13.00	24.00	35.00		1.88	0.50
SL-16	16 to 24	16		14.00	24.00	37.00		1.88	0.50
SL-16	30	16		14.00	24.00	37.00		1.88	0.50
SL-18	16 to 24	18		16.00	24.00	41.00		1.88	0.50
SL-18	30	18		16.00	24.00	41.00		1.88	0.50
SL-20	16 to 24	20		18.00	24.00	44.00		1.88	0.50
SL-20	30	20		18.00	24.00	44.00		1.88	0.50
SL-20	36	20		18.00	30.00	44.00		1.88	0.50
SL-24	16 to 24	24		20.00	30.00	48.00		2.38	0.50
SL-24	30	24		20.00	30.00	48.00		2.38	0.50
SL-24	36	24		20.00	30.00	48.00		2.38	0.50

v21.1

Can Dia.	B	C	D	K	M	N
8.75	13.50	11.50	1.00	9.00	0.63	0.32
10.75	16.00	13.00	1.13	11.00	0.88	0.37
12.75	19.00	16.00	1.13	12.00	0.88	0.33
14.00	21.00	18.00	1.13	12.00	0.88	0.38
16.00	23.50	20.00	1.38	14.00	1.13	0.38
18.00	25.00	22.00	1.38	15.00	1.13	0.38
20.00	27.50	24.00	1.38	16.00	1.13	0.38
24.00	32.00	28.00	1.38	18.00	1.13	0.38
30.00	38.75	34.00	1.88	21.00	1.25	0.38
36.00	46.00	40.00	1.88	24.00	1.25	0.38
48.00	59.50	53.50	1.88	30.00	1.25	0.38

v21.1

- ‡ Bypass may be located outside of discharge housing, if permissible by can size.
- * Dimensions in all cases should be changed to be less than or equal to can size.
- H¹ Dimension must be specified when using a spacer type flanged motor coupling, and will vary according to coupling size and sealing arrangement. Consult factory.