


Fabricated 'SM' Style Motor Stand For Underground Discharge

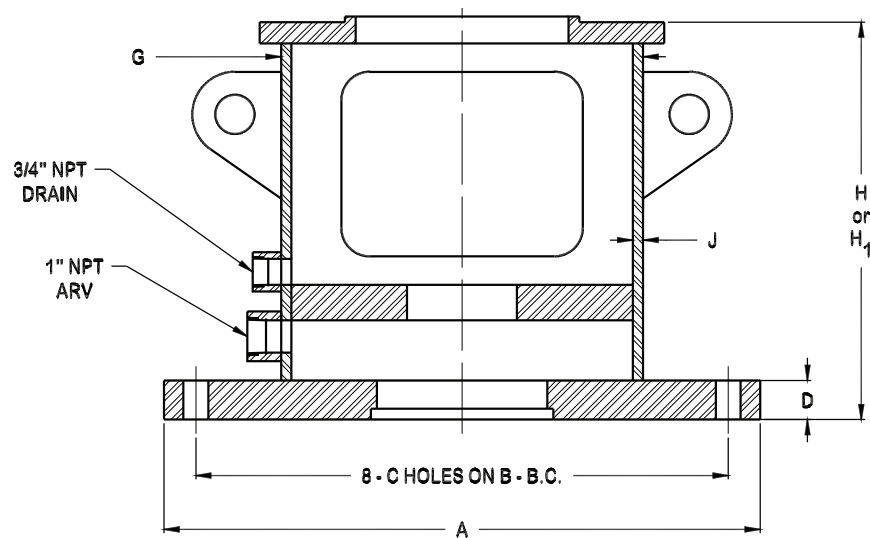

Model	Driver B.D.	Col. Size	A	B	C	D	G	H	H ₁	J
SM-3	10 to 12	3	16.00	14.25	0.75	1.13	10.75	15.50	Consult Factory	0.37
SM-4	10 to 12	4	16.00	14.25	0.75	1.13	10.75	16.50		0.37
SM-5	10 to 12	5	19.00	17.00	0.88	1.38	12.75	18.50		0.38
SM-5	16	5	19.00	17.00	0.88	1.38	14.00	18.50		0.38
SM-6	10 to 12	6	21.00	18.75	0.88	1.38	12.75	18.00		0.38
SM-6	16	6	21.00	18.75	0.88	1.38	14.00	18.00		0.38
SM-8	10 to 12	8	27.50	25.00	0.88	1.38	14.00	19.00		0.38
SM-8	16 to 20	8	27.50	25.00	0.88	1.38	14.00	19.00		0.38
SM-8	24	8	27.50	25.00	0.88	1.38	14.00	19.00		0.38
SM-10	10 to 12	10	32.00	29.50	1.00	1.38	14.00	18.75		0.38
SM-10	16 to 20	10	32.00	29.50	1.00	1.38	16.00	18.75		0.38
SM-10	24	10	32.00	29.50	1.00	1.38	18.00	18.75		0.38
SM-10	30	10	32.00	29.50	1.00	1.38	24.00	18.75		0.50
SM-12	16 to 20	12	32.00	29.50	1.00	1.38	18.00	18.75		0.38
SM-12	24	12	32.00	29.50	1.00	1.38	18.00	18.75		0.38
SM-12	30	12	32.00	29.50	1.00	1.38	24.00	18.75		0.50
SM-14	16 to 20	14	34.25	31.75	1.13	1.88	18.00	19.00		0.38
SM-14	24	14	34.25	31.75	1.13	1.88	20.00	19.00		0.38
SM-14	30	14	34.25	31.75	1.13	1.88	24.00	19.00		0.50
SM-16	16 to 24	16	36.50	34.00	1.13	1.88	24.00	19.00		0.50
SM-16	30	16	36.50	34.00	1.13	1.88	24.00	19.00		0.50
SM-18	16 to 24	18	36.50	34.00	1.12	1.88	24.00	20.00		0.50
SM-18	30	18	36.50	34.00	1.12	1.88	24.00	20.00		0.50
SM-20	16 to 24	20	43.75	40.50	1.62	1.88	24.00	20.00		0.50
SM-20	30	20	43.75	40.50	1.62	1.88	24.00	20.00		0.50
SM-20	36	20	43.75	40.50	1.62	1.88	30.00	20.00		0.50
SM-24	16 to 24	24	43.75	40.50	1.62	2.38	30.00	20.00		0.50
SM-24	30	24	43.75	40.50	1.62	2.38	30.00	20.00		0.50
SM-24	36	24	43.75	40.50	1.62	2.38	30.00	20.00		0.50

v21.1