


Fabricated
Submersible
Discharge

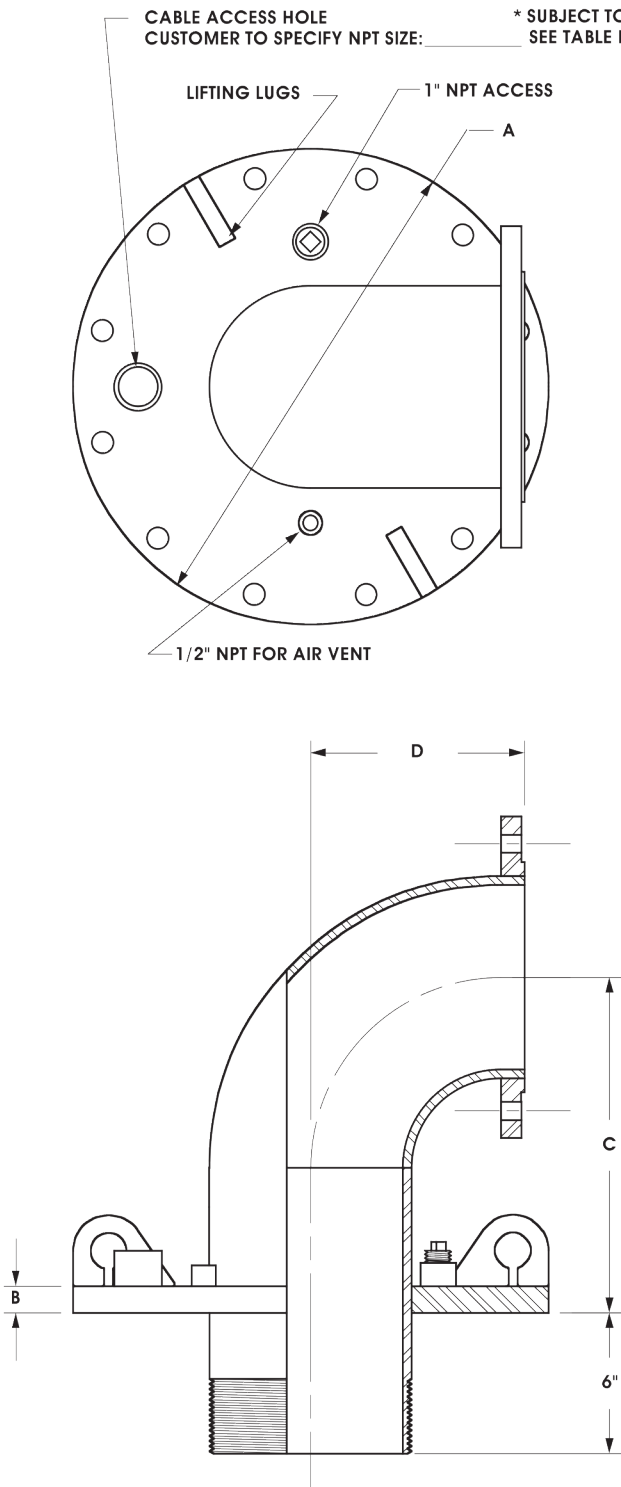

WELL CASING DIAMETER								
	6	8	10	12	14	16	18	20
A	11.00	13.50	16.00	19.00	21.00	23.50	25.00	27.50
B - cls D	0.69	0.69	0.69	0.81	0.94	1.00	1.06	1.13
B - 150#	1.00	1.13	1.19	1.25	1.38	1.44	1.56	1.69

v18.1

ELBOW & NIPPLE DIAMETER								
	2	3	4	5	6	8	10	12
C	5.00	6.50	8.00	10.00	11.50	14.75	17.75	20.75
D	3.75	5.13	7.13	8.63	10.13	12.88	17.63	19.50

v18.1

BASE PLATE MOUNTING HOLE PATTERN								
	6	8	10	12	14	16	18	20
hole Ø	.88	.88	1.00	1.00	1.13	1.13	1.25	1.25
quantity	8	8	12	12	12	16	16	20
B. C.	9.50"	11.75	14.25	17.00	18.75	21.25	22.75	25.00

v18.1

MAXIMUM CABLE AND ACCESS TAP SIZES

		CASING							
		6	8	10	12	14	16	18	20
RISER	2	3/4	1-1/2	2-1/2	3	4	4	4	4
	3	-	1	2	2-1/2	3	4	4	4
	4	-	1/2	1-1/2	2-1/2	2-1/2	3	4	4
	5	-	-	3/4	1-1/2	2	3	4	4
	6	-	-	-	1-1/4	1-1/2	2-1/2	3	4
	8	-	-	-	-	3/4	1-1/2	2-1/2	3
	10	-	-	-	-	-	1/2	1-1/2	2-1/2
	12	-	-	-	-	-	-	-	1-1/4

TAP SIZE

v18.1

- Standard features include:
- Lifting lugs
 - 1" npt access hole
 - 1/2" npt for air vent
 - ANSI 150# raised face discharge flange.
 - ANSI 150# hole pattern base plate.