



Vertical Solid Shaft
Motor Coupling

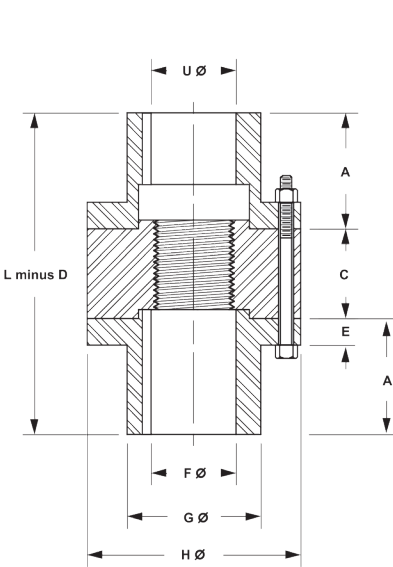

ADJUSTABLE FLANGED MOTOR COUPLING

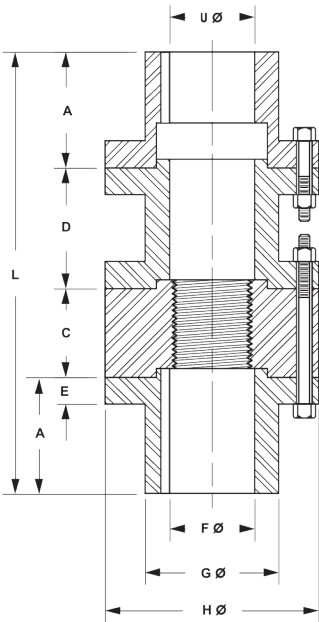

ADJUSTABLE FLANGED SPACER MOTOR COUPLING

Cplg. Size	L*	A	C	D*	E	F		G	H	Bolt Size	Bolts/ Flange
						Min	Max				
1 1/8	10.00	2.00	1.50	4.50	0.50	1	1 1/4	2.50	4.25	3/8	4
1 5/8	11.38	2.69	1.50	4.50	0.63	1	1 11/16	2.88	5.00	3/8	6
2 1/8	12.13	2.69	2.25	4.50	0.75	1 1/2	2 3/16	3.63	6.00	1/2	6
2 3/8	14.00	3.00	2.50	5.50	0.75	1 11/16	2 7/16	4.25	6.88	5/8	6
2 5/8	14.00	3.00	2.50	5.50	0.75	1 15/16	2 11/16	4.25	6.88	5/8	6
2 7/8	15.38	3.44	3.00	5.50	0.88	1 15/16	2 15/16	4.88	8.00	5/8	8

* MAY VARY ACCORDING TO SEALING ARRANGEMENT. CONSULT FACTORY FOR INFORMATION. v18.1

Cplg. Size	Max Thrust	HP Rating @ RPM					Motor Shaft Dimensions					
		3450	1770	1160	880	700	U	AH	EU	EW	EY/EX	Sq. Key
1 1/8	23,000	160	80	50	40	30	1 1/8	2.75	0.875	0.375	0.75	1/4
1 5/8	34,000	570	290	190	140	110	1 5/8	4.50	1.250	0.375	0.75	3/8
2 1/8	47,000	970	500	330	250	200	2 1/8	4.50	1.750	0.375	0.75	1/2
2 3/8	54,000	1620	830	540	410	330	2 3/8	5.00	2.000	0.375	0.75	5/8
2 5/8	61,000	1790	920	600	460	360	2 5/8	5.00	2.250	0.375	0.75	5/8
2 7/8	86,000	2550	1310	860	650	520	2 7/8	7.00	2.375	0.500	1.00	3/4

v18.1