


## 'SPC' Style Cast Discharge Head

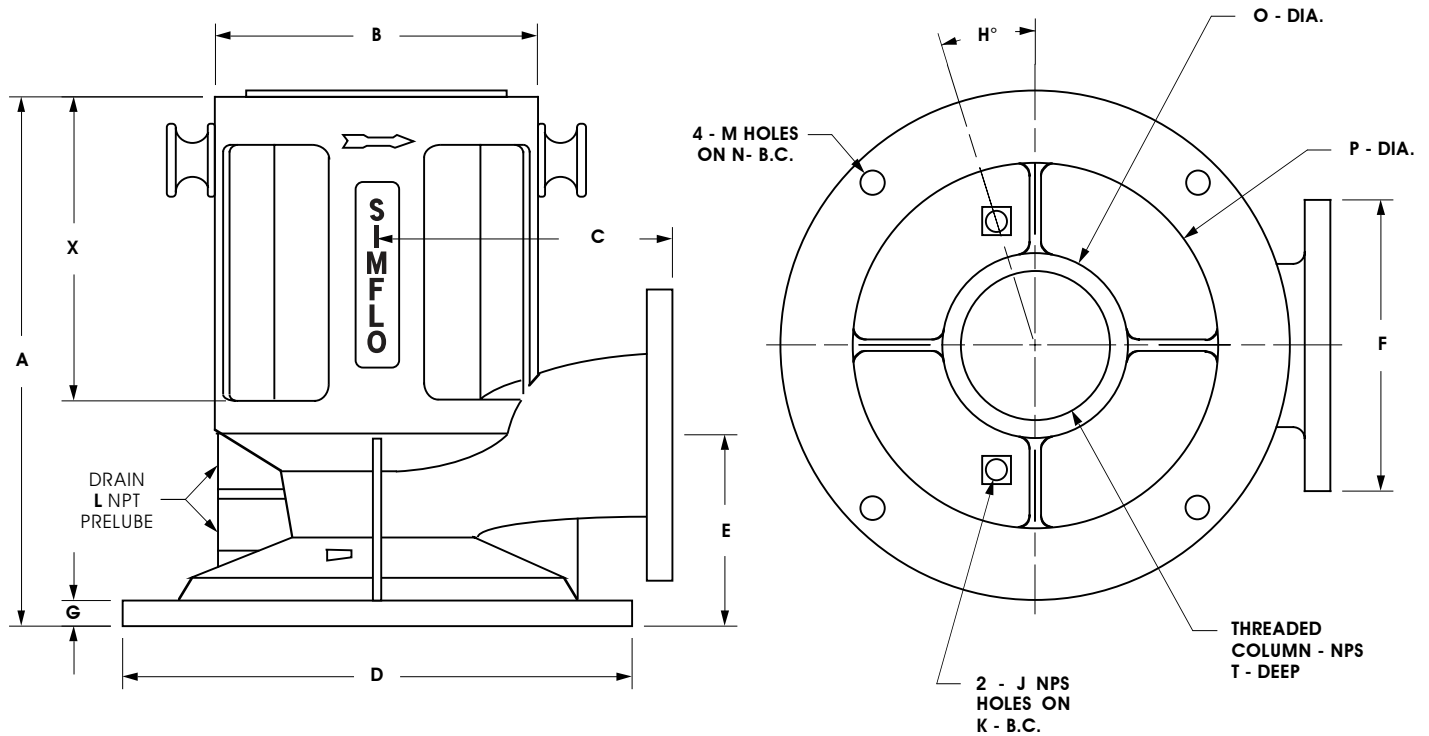

| Model Number | Size | A     | B    | C     | D     | E     | F    | G    | H    | J   | K     | L   | M   | N     | O     | P     | T    | X     |
|--------------|------|-------|------|-------|-------|-------|------|------|------|-----|-------|-----|-----|-------|-------|-------|------|-------|
| SPC-3        | 3    | 16.75 | 10.0 | 7.50  | 13.50 | 5.25  | 7.5  | 0.75 | 19.5 | 1/2 | 7.50  | 1/2 | .75 | 11.75 | 6.00  | 9.00  | 1.38 | 9.38  |
| SPC-4        | 4    | 16.50 | 10.0 | 9.13  | 16.00 | 6.00  | 9.0  | 0.81 | 18.5 | 1/2 | 7.50  | 3/4 | .75 | 14.25 | 5.75  | 11.25 | 1.38 | 9.50  |
| SPC-6        | 6    | 20.13 | 16.5 | 11.50 | 20.88 | 7.00  | 11.0 | 1.00 | 20.0 | 3/4 | 10.50 | 3/4 | .75 | 18.75 | 8.50  | 14.50 | 1.75 | 11.63 |
| SPC-8        | 8    | 22.31 | 16.5 | 13.13 | 23.88 | 8.50  | 13.5 | 1.00 | 20.0 | 1   | 13.00 | 3/4 | .88 | 21.25 | 10.50 | 16.50 | 1.75 | 12.13 |
| SPC-10       | 10   | 26.00 | 20.0 | 15.00 | 27.25 | 11.00 | 16.0 | 1.13 | 24.0 | 1   | 16.75 | 3/4 | .88 | 25.00 | 12.50 | 20.50 | 2.50 | 13.25 |

| Model Number | Weight [lbf] | Discharge Flange | Column Type        | Max Operating Hanging Wt. [lbf] | Max Lifting Load [lbf] | *Setting [ft] |
|--------------|--------------|------------------|--------------------|---------------------------------|------------------------|---------------|
| SPC-3        | 87           | 150/300#         | Threaded           | 60000                           | 12500                  | 700           |
| SPC-4        | 145          | 150/300#         | Threaded / Flanged | 100000                          | 17500                  | 900           |
| SPC-6        | 300          | 150/300#         | Threaded           | 150000                          | 27500                  | 1000          |
| SPC-8        | 395          | 150/300#         | Threaded           | 165000                          | 30000                  | 1100          |
| SPC-10       | 595          | 150#             | Threaded           | 350000                          | 45000                  | 1000          |

v21.2

NOTE: \*Setting is Max Setting Depth in feet based on typical construction column and inner column weight during installation. Max operating depth is dependent on other factors not listed. Consult Operation and Maintenance Manual for applicable installation and setting procedures.

All heads listed are of 65-45-12 Ductile Iron construction

SPC-3 is available with optional 8" ANSI 150# base plate drilling for booster can use.  
 SPC-4 is available with optional 10" ANSI 150# base plate drilling for booster can use.  
 SPC-6 is available with optional 14" ANSI 150# base plate drilling for booster can use.  
 SPC-8 is available with optional 16" ANSI 150# base plate drilling for booster can use.  
 SPC-10 is available with optional 20" ANSI 150# base plate drilling for booster can use.