


Enclosed Lineshaft Turbine Bowl Assembly Dimensions

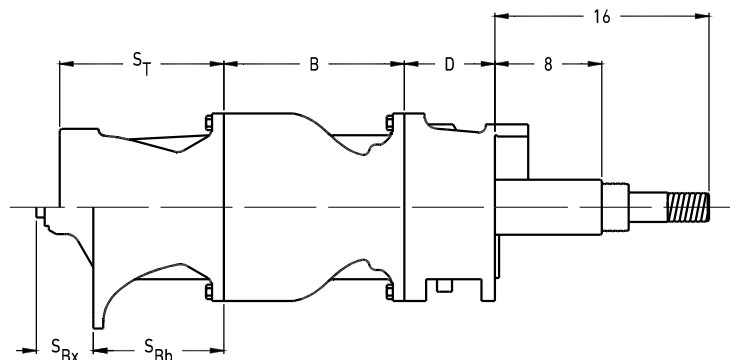

		Suction						Discharge			
Model	Bowl Dia.	Integral Bell			Threaded		Bowl B	Threaded / Flanged			
		Bell Dia.	S _{Bb}	S _{Bx}	Size	S _T		Size	D	Size	D
SR11(O)	11.50	11.38	6.5	4.5	8" NPT	9.125	9.5	8	7.5	10	7.5
SP11	11.25	11.38	6.5	4.5	8" NPT	10	10	8	7.5	10	7.5
SW12	12.00	11.38	6.50	4.50	8" NPT	10.00	9.00	8	7.50	10	7.50
SL12	11.75	11.38	6.50	4.50	8" NPT	10.00	10.00	8	7.50	10	7.50
SJ12	12.00	11.38	6.50	4.50	8" NPT	10.00	10.75	8	7.50	10	7.50
SM12	11.88	11.38	6.50	4.50	8" NPT	10.00	11.00	8	7.50	10	7.50
SM14(O)	14.00	18.13/13.88	9.75	4.25	10" NPT	12.25	13.50	10	6.75	12	6.75
SM14	14.00	18.13/13.88	9.75	4.25	10" NPT	12.25	13.50	10	6.75	12	6.75
SM16(O)	15.25	19.25/15.25	10.44	2.19	12" NPT	12.38	15.00	12	10.44	14	12.94
SM16	15.25	19.25/15.25	10.44	2.19	12" NPT	12.38	15.00	12	10.44	14	12.94
SJ18	17.76	19.25/18.13	10.75	3.00	---	---	18.00	14*	14.00	---	---
SM20	19.25	19.25	12.00	5.88	---	---	18.00	16*	14.00	---	---
SJ20	20.87	22.75/19.25	12.63	3.13	---	---	21.50	16*	14.00	---	---
SM24	24.00	26.00/22.75	15.38	7.00	---	---	21.00	18*	13.00	---	---
SM28	28.00	26.00/22.75	17.00	9.88	---	---	24.00	20*	14.00	---	---

* Flanged Discharge Only / Threaded available with Adapter. Consult Factory

v25.2

Dimensions are in inches and are subject to change without notice.