


Open Lineshaft Mixed Flow / Axial Flow Bowl Assembly Dimensions

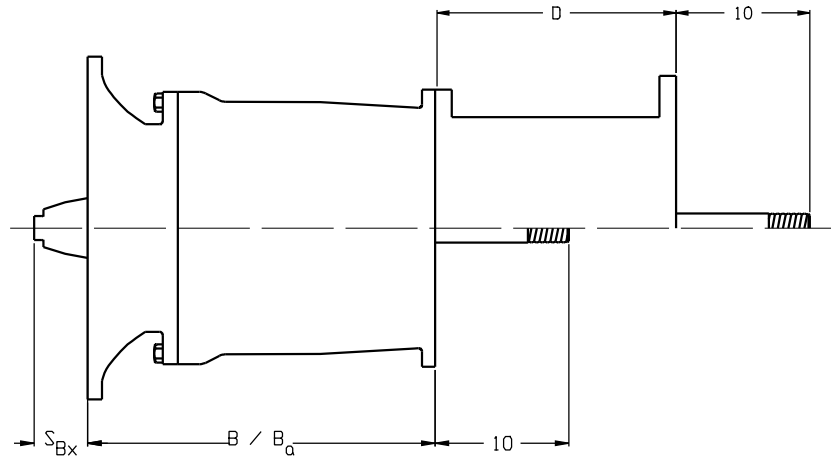

Model	Bowl Dia.	Suction		Bowl		Discharge					
		Integral Bell		B	B_a	Bowl Column Adapter					
		Bell Dia.	S_{Bx}			Size	D	Size	D	Size	D
PA7	10.75	11.50	2.50	9.50	8.00	8	12.00	10	12.00	---	---
PA9	12.50	14.00	2.50	13.00	10.00	10	12.00	12	12.00	---	---
PR10	12.50	15.25	2.50	15.88	14.75	10	12.00	12	12.00	14	18.00
PA10	14.88	18.25	2.50	16.63	13.00	12	12.00	14	18.00	16	18.00
PR12	15.25	18.25	2.50	19.00	18.00	12	12.00	14	18.00	16	18.00
PA12	17.25	22.00	2.50	20.00	15.00	14	18.00	16	18.00	18	18.00
PR14	17.25	22.00	2.50	22.00	21.00	14	18.00	16	18.00	18	18.00
PR16	20.00	24.75	2.50	24.50	23.00	16	18.00	18	18.00	20	24.00
PA16	21.50	27.00	2.50	20.50	16.00	16	18.00	18	18.00	20	24.00
PR18	21.50	27.25	2.50	27.50	27.50	18	18.00	20	24.00	24	24.00
PA20	26.00	33.00	2.50	25.63	20.00	18	18.00	20	24.00	24	24.00
PR22	26.00	34.00	2.50	29.50	28.00	18	18.00	20	24.00	24	24.00
PR26	36.00	40.00	2.50	34.00	32.00	18	18.00	20	24.00	24	24.00
PA26	36.00	42.00	2.50	33.00	32.00	20	24.00	24	24.00	30	36.00

Note: B_a = additional stage length for multi-stage construction

v24.1

Dimensions are in inches and are subject to change without notice.