


Enclosed Lineshaft Bowl Assembly Dimensions

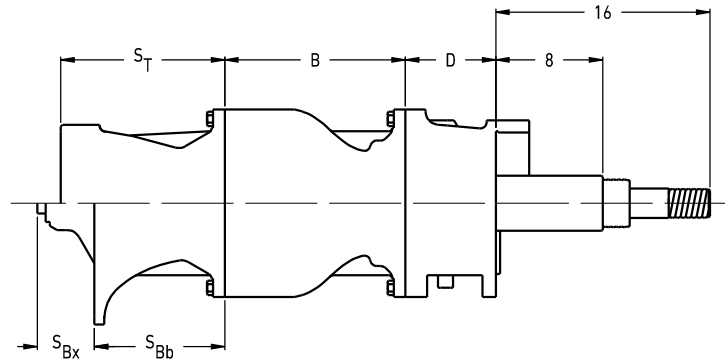

		Suction						Discharge			
Model	Bowl Dia.	Integral Bell			Threaded		Bowl	Threaded / Flanged			
		Bell Dia.	S _{Bb}	S _{Bx}	Size	S _T		B	Size	D	Size
SP6	6.00	8.00/6.00	4.625	3.125	4" NPT	6.75	4.813	4	5.5	---	---
SP6(O)	6.00	8.00/6.00	4.625	3.125	4" NPT	6.75	4.813	4	5.5	---	---
SM6	6.00	8.00/6.00	4.69	3.13	4" NPT	6.75	5.25	4	5.25	---	---
SK6	5.50	8.00/6.00	4.63	3.13	4" NPT	6.75	5.50	4	5.50	---	---
SP7	7.19	9.38/8.00	5.75	3.88	5" NPT	6.50	6.38	5	5.25	6	6.75
SK7	6.56	9.38/8.00	5.63	3.88	5" NPT	6.50	6.38	---	---	---	---
SM7	7.00	9.38/8.00	5.75	3.88	5" NPT	6.50	7.00	5	5.25	6	6.75
SP8	7.88	9.38/8.00	5.75	3.88	5" NPT	6.19	6.38	5	6.13	6	7.63
SM8	7.69	9.38/8.00	5.75	3.88	5" NPT	6.19	6.00	5	6.13	6	7.63
SK8	7.50	---	---	---	6" NPT	8.63	9.00	6	7.63	---	---
SP9	9.50	10.00	5.88	3.75	6" NPT	8.63	7.75	6	6.75	8	6.75
SM9	9.50	10.00	5.88	3.75	6" NPT	8.63	7.75	6	6.75	8	6.75
SL9	9.00	10.00	5.88	3.75	6" NPT	9.00	8.50	6	6.38	8	6.75
SF9	9.50	10.00	5.63	3.75	6" NPT	8.63	7.50	6	6.75	8	6.75
SK9	9.44	---	---	---	8" NPT	9.63	10.63	8	6.75	---	---
SP10	10.19	10.00	5.88	3.75	6" NPT	8.63	7.25	6	6.50	8	6.50
SM10(O)	10.19	10.00	5.88	3.75	6" NPT	9.38	8.88	6	6.50	8	6.50
SM10	10.19	10.00	5.88	3.75	6" NPT	8.63	8.88	6	6.50	8	6.50
SM11	10.63	11.38	6.50	4.50	8" NPT	10.00	8.63	6	6.50	8	6.50
SL11	10.88	11.38	6.50	4.50	8" NPT	9.31	10.00	6	6.50	8	6.50
SR11(O)	11.50	11.38	6.50	4.50	8" NPT	9.13	9.50	8	7.50	10	7.50
SP11	11.25	11.38	6.50	4.50	8" NPT	10.00	10.00	8	7.50	10	7.50
SW12	11.63	11.38	6.50	4.50	8" NPT	10.00	9.00	8	7.50	10	7.50
SL12	11.75	11.38	6.50	4.50	8" NPT	10.00	10.00	8	7.50	10	7.50
SJ12	12.00	11.38	6.50	4.50	8" NPT	10.00	10.75	8	7.50	10	7.50
SM14	14.00	18.13/13.88	9.75	4.25	10" NPT	12.25	13.50	10	6.75	12	6.75
SM16(O)	15.25	19.25/15.25	10.44	2.19	12" NPT	13.81	15.00	12	10.44	14	12.94
SM16	15.25	19.25/15.25	10.44	2.19	12" NPT	13.81	15.00	12	10.44	14	12.94
SM20	19.25	19.25	12.00	5.88	---	---	18.00	16*	14.00	---	---
SM24	24.00	26.00	15.38	7.00	---	---	21.00	18*	13.00	---	---
SM28	28.00	26.00	17.00	9.88	---	---	24.00	20*	14.00	---	---

* Flanged Discharge Only / Threaded available with Adapter. Consult Factory

v23.1

Dimensions are in inches and are subject to change without notice.