




SJ20M
1160 RPM

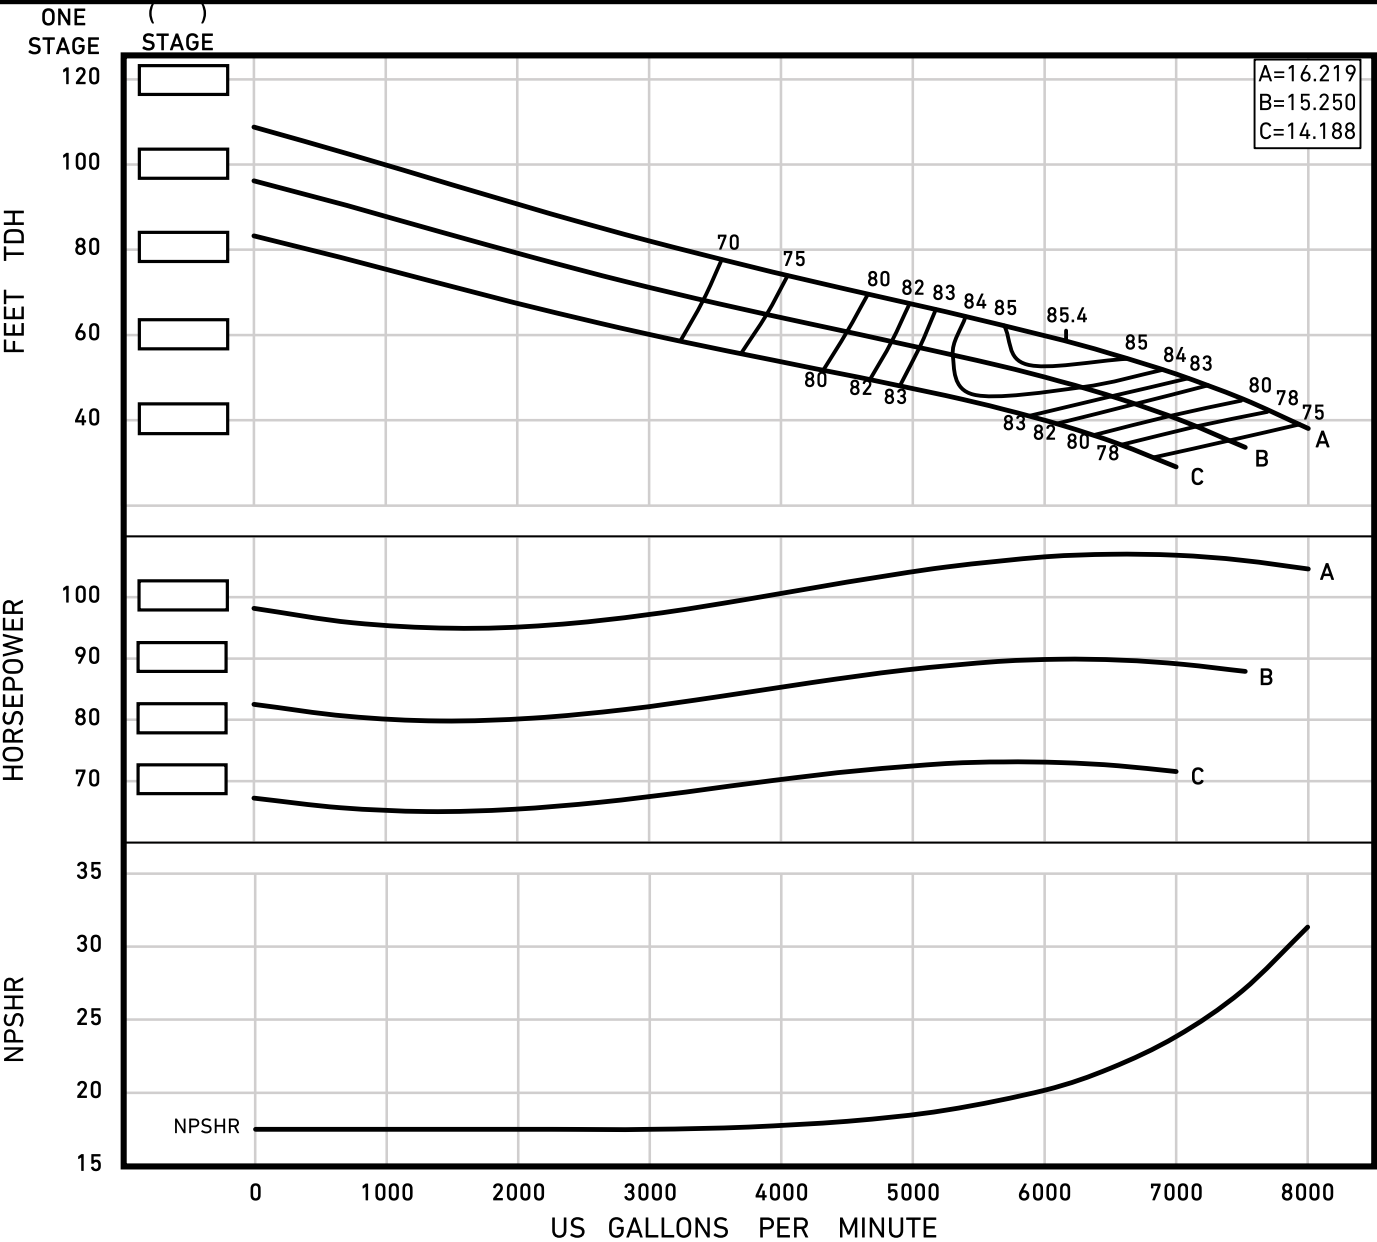

Impeller Type	Enclosed	Bowl OD (in.)	20.87	PEI cl	N/A	Qty.	Eff.
Impeller Model	SJ20M	Thd'd Discharge Size	Δ	Ns	4300	Stages	Change
One Stage Weight (lb)	1000	Thd'd Suction Size	N/A	Nss	9406	1	0
Add'l Stage Wt. (lb)	465	Bell Suction Size	22.75"	Shaft Size (in.)	2.438	2	0
Impeller Wt. (lb)	74.70	Sub. Mtr. Size	N/A	Lateral (in)	1.44	3	0
Std. Impeller Mtrl.	316 SS	C.I. Bowl Rating (psi)	326	Setting (in)	.125	4	0
One Stage Length (in)	~48.13	D.I. Bowl Rating (psi)	Δ	K-Factor (lb/ft tdh)	45.00	5	0
Add'l Stage Length (in)	21.50	S.S. Bowl Rating (psi)	Δ668	Imp. WR ² (lb-ft ²)	9.84		

Δ Consult factory for availability

Rev. 2025.05.12

Data reflects nominal performance and may be derated for specified ANSI/HI 14.6 acceptance grade and/or materials of construction. Consult factory.

Weights and lengths listed are approximate and subject to change. Consult factory.