


SL11L
1770 RPM

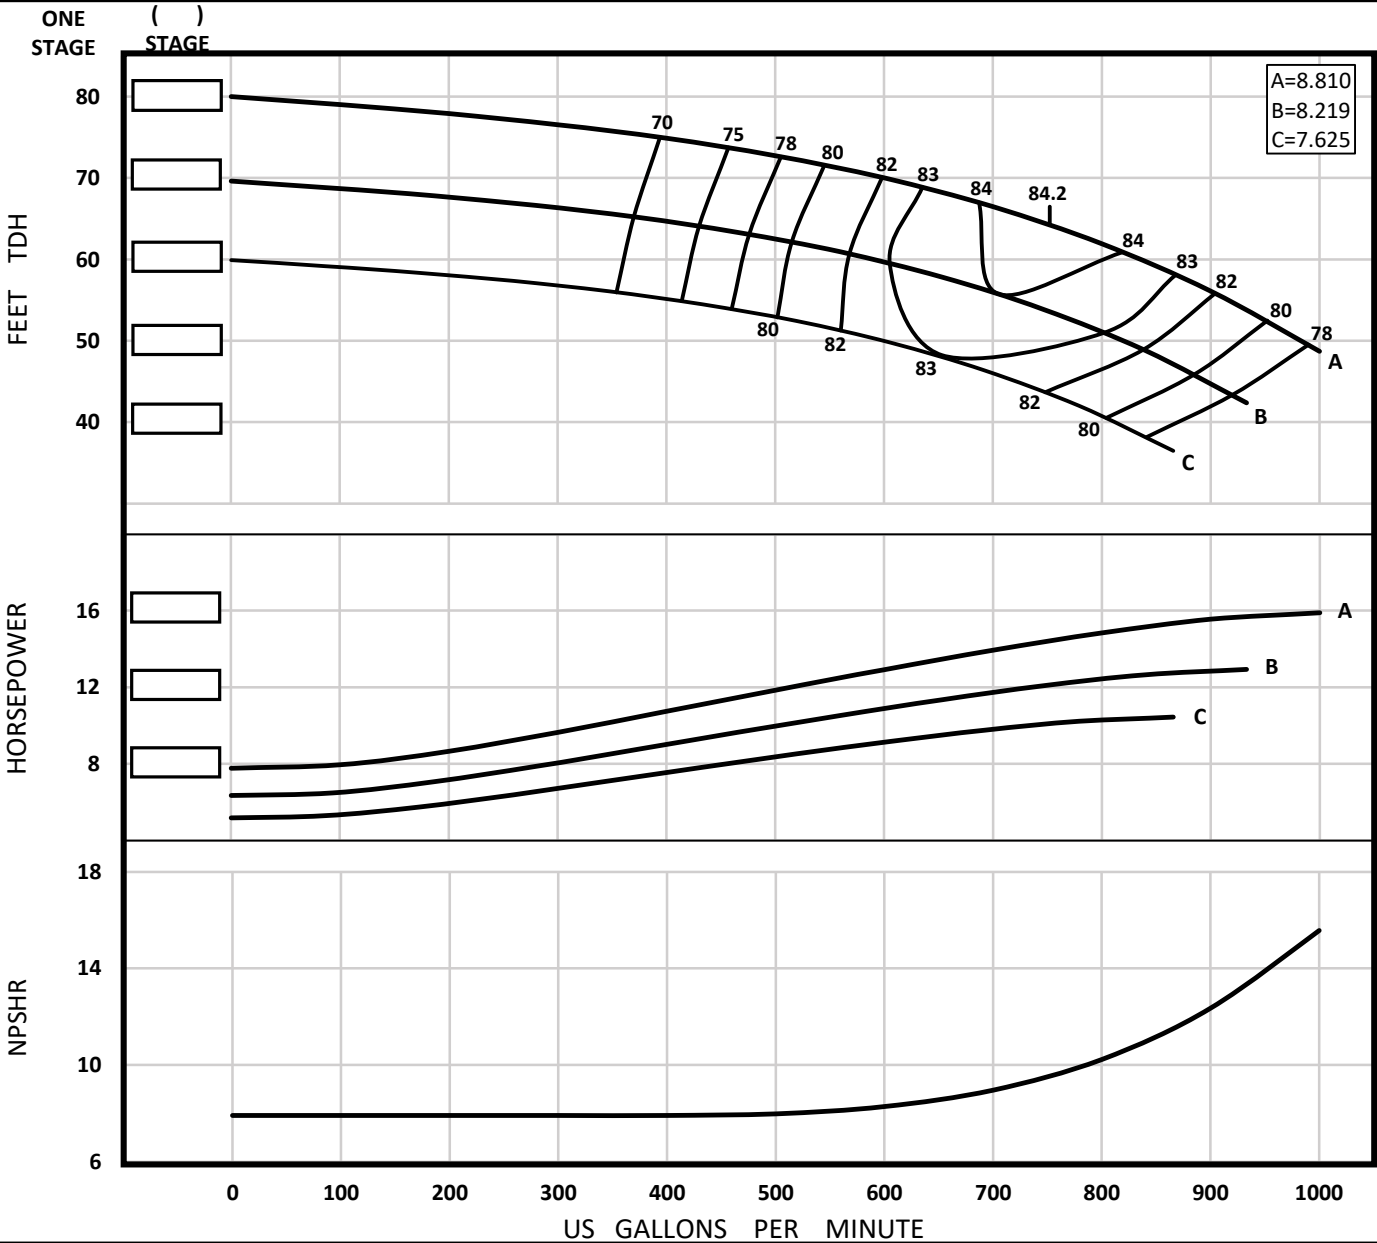

Impeller Type	Enclosed	Bowl OD (in.)	11.00	PEI cl	N/A	Qty.	Eff.
Impeller Model	SL11L	Thd'd Discharge Size	4" / 6" / 8"	Ns	2139	Stages	Change
One Stage Weight (lb)	200.00	Thd'd Suction Size	8"	Nss	8920	1	-3
Add'l Stage Wt. (lb)	81.00	Bell Suction Size	11.38"	Shaft Size (in.)	1.6875	2	-2
Impeller Wt. (lb)	9.74	Sub. Mtr. Size	8"/ 10"/ 12"	Lateral (in)	1.25	3	-1
Std. Impeller Mtrl.	316 SS	C.I. Bowl Rating (psi)	404	Setting (in)	.125	4	0
One Stage Length (in)	~25.813	D.I. Bowl Rating (psi)	Δ	K-Factor (lb/ft tdh)	7.00	5	0
Add'l Stage Length (in)	10.00	S.S. Bowl Rating (psi)	Δ	Imp. WR ² (lb-ft ²)	.313		

Δ Consult factory for availability

Rev. 2025.06.02

Data reflects nominal performance and may be derated for specified ANSI/HI 14.6 acceptance grade and/or materials of construction. Consult factory.

Weights and lengths listed are approximate and subject to change. Consult factory.